

# MARSCHNER-LAGERTRAFO-PROGRAMM

Range available ex stock




Typ/Type      Nennleistung/Power

**EI30/24      2,6 VA**

Sicherheitstrafo / Kurzschlußfest  
**VDE-geprüft 0570 / EN 61558**  
**ENEC10 / UL 506 / CSA**  
 Stoßspannungsgeprüft  
 Vakuum Epoxidverguss  
 Temperaturklasse **ta 70° C/B**  
 Cul-Gewicht: 20 g  
 Trafo-Gewicht: 145 g

Safety transformer / Short-circuit-proof  
**VDE-approved 0570 / EN 61558**  
**ENEC10 / UL506 / CSA**  
 Surge resistance approved  
 Vacuum Epoxy-Casting  
 Temperature class **ta 70° C/B**  
 Cul-Weight: 20 g  
 Trafo-Weight: 145 g

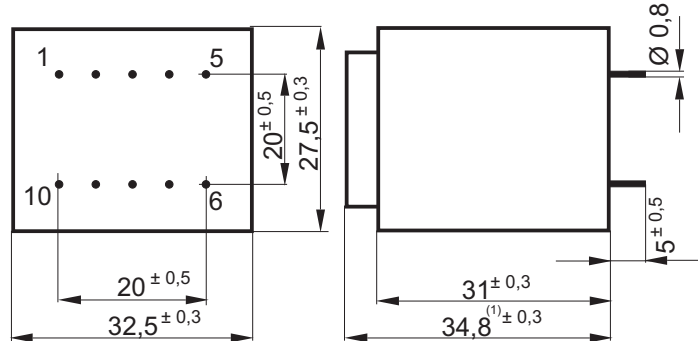

Ansicht auf Stiftseite - Pin view  
 Abmessungen - Dimension in mm

<sup>(1)</sup>34,0  
 auf Anfrage/on request



Bestell Nr. Order No.	Primär Primary	Sekundär [ V ] Secondary	Strom [ mA ] Current	Stiftbelegung Pin	Leerlaufspannung [ V ] No-Load Voltage ca.	Prüfzeichen / Approvals		
						VDE	UL 1585	UL 506
VN30.24/10544*	230V~	6	433	1+5/7+9	10,0	●		●
VN30.24/10545	230V~	9	288	1+5/7+9	14,5	●		●
VN30.24/10546	230V~	12	216	1+5/7+9	20,0	●		●
VN30.24/10547	230V~	15	173	1+5/7+9	23,5	●		●
VN30.24/10548*	230V~	18	144	1+5/7+9	29,1	●		●
VN30.24/10549*	230V~	24	108	1+5/7+9	36,3	●		●
VN30.24/10550*	230V~	2x 6	2x216	1+5/6+7-9+10	2x10,2	●		●
VN30.24/10551*	230V~	2x 7,5	2x173	1+5/6+7-9+10	2x12,0	●		●
VN30.24/10552	230V~	2x 9	2x144	1+5/6+7-9+10	2x14,9	●		●
VN30.24/10553	230V~	2x12	2x108	1+5/6+7-9+10	2x19,3	●		●
VN30.24/10554	230V~	2x15	2x 86	1+5/6+7-9+10	2x24,3	●		●
VN30.24/10974*	230V~	2x18	2x 72	1+5/6+7-9+10	2x29,3			●
VN30.24/10975*	230V~	2x24	2x 54	1+5/6+7-9+10	2x37,0			●
VN30.24/20544*	115V~	6	433	1+5/7+9	10,0			●
VN30.24/20545*	115V~	9	288	1+5/7+9	14,5			●
VN30.24/20546*	115V~	12	216	1+5/7+9	20,0			●
VN30.24/20547*	115V~	15	173	1+5/7+9	23,5			●
VN30.24/20548*	115V~	18	144	1+5/7+9	29,1			●
VN30.24/20549*	115V~	24	108	1+5/7+9	36,3			●
VN30.24/20550*	115V~	2x 6	2x216	1+5/6+7-9+10	2x10,2			●
VN30.24/20551*	115V~	2x 7,5	2x173	1+5/6+7-9+10	2x12,0			●
VN30.24/20552*	115V~	2x 9	2x144	1+5/6+7-9+10	2x14,9			●
VN30.24/20553*	115V~	2x12	2x108	1+5/6+7-9+10	2x19,3			●
VN30.24/20554*	115V~	2x15	2x 86	1+5/6+7-9+10	2x24,3			●
VN30.24/20974*	115V~	2x18	2x 72	1+5/6+7-9+10	2x29,3			●
VN30.24/20975*	115V~	2x24	2x 54	1+5/6+7-9+10	2x37,0			●

Wirkungsgrad / Efficiency 50 %

Spannungs-Abfall / Voltage drop 62%

\* keine Lagerware  
 VPE 128 Stück pro Karton.

\* not available ex stock  
 Packing unit 128 pieces per box.