



Typ/Type Nennleistung/Power

EI84 max. 130 VA




Typ / series	VA	Temperaturklasse Temperature class	Wirkungsgrad Efficiency	Spannungs Abfall Voltage drop	ca. g Copper-weight	ca. Kg Total-weight
EI84/29,5	90	ta70°C/B	82	14	300	1,700
EI84/43,5	130	ta40°C/B	84	10	350	2,200

Typ/Type




Typ / series	EI84/29,5	EI84/43,5
KK	63,5	76,5
C		

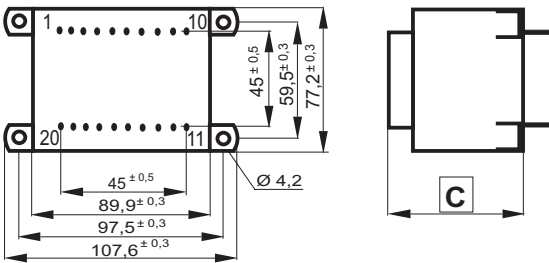

Typ/Type



Typ / series	EI84/29,5	EI84/43,5
VL	63,7	77,7
D	32,5	45

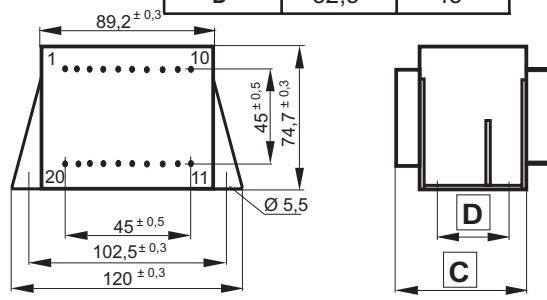

Ansicht auf Stiftseite - Pin view
Abmessungen - Dimension in mm

Typ/Type Nennleistung/Power


EI96 max. 220 VA



Typ / series	VA	Temperaturklasse Temperature class	Wirkungsgrad Efficiency	Spannungs Abfall Voltage drop	ca. g Copper-weight	ca. Kg Total-weight
EI96/35,7	140	ta40°C/B	87	9	480	2,300
EI96/45,7	180	ta40°C/B	87	9	500	2,800
EI96/59,7	220	ta40°C/B	89	7	600	4,200


Typ/Type

Typ / series	EI96/35,7	EI96/45,7	EI96/59,7
KK	74,6	84,4	99,2
C			

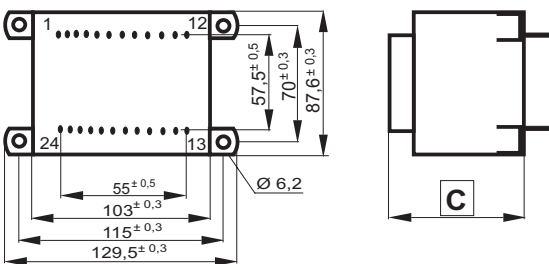

Typ/Type

Typ / series	EI96/35,7	EI96/45,7	EI96/59,7
VL	74,6	84,6	98,5
D	40	50	64

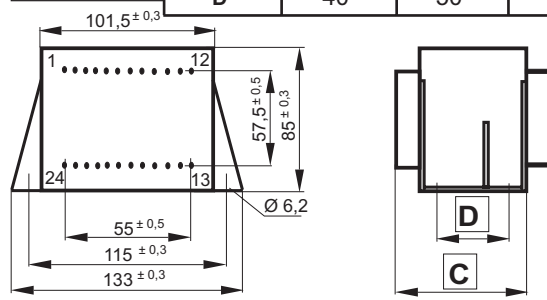

Ansicht auf Stiftseite - Pin view
Abmessungen - Dimension in mm