


# CB12245A Battery Charger

One product for the field: 12 and 24 Vdc

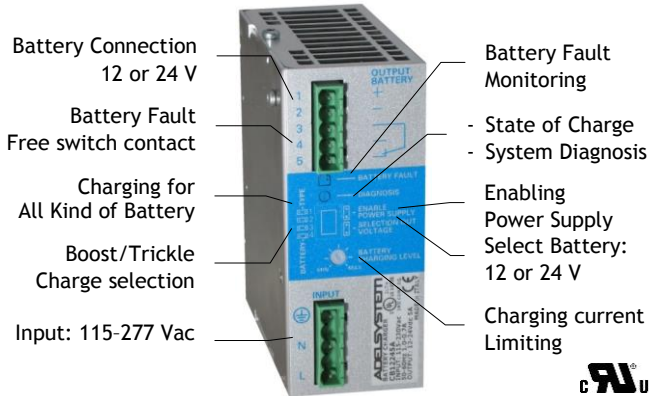

Input: Single-phase 115 ÷ 277 Vac  
 Output Jumper Selectable: 12 Vdc 6A; 24 Vdc 5 A  
 Power Supply Function: setting by Jumper  
 Suited for the following battery types: Open Lead Acid, Sealed Lead Acid, lead Gel, Ni-Cd, Li-Ion (option)

Battery Care for, automatic diagnostic of battery status, short circuit element,  
 Charging curve IUoUo, constant voltage and current  
 Switching technology Semi-resonant  
 Four charging levels: Boost, Absorption, Trickle, Recovery.  
 Protected against short circuit, inverted polarity, over Load.  
 Signal output (contact free) for fault battery state  
 Protection degree IP20 - DIN rail

## Technical features

The CB series is a "Switching technology" and "Battery Care philosophy", since years parts of the core know-how at ADEL system, led to the development of this advanced multi-stage battery charging method, completely automatic and suited to meet the most advanced requirements of battery manufacturers. The Battery Care concept is based on algorithms that implement rapid and automatic charging, battery charge optimization during time, flat batteries recovery and real time diagnostic during installation and operation. The Real Time Auto-diagnostic system, monitoring battery faults such as, elements in short circuit, accidental reverse polarity connection, disconnection of the battery, they can easily be detected and removed by help of Blink Code of Diagnosis Led; during the installation and after sell. Each device is suited for all battery types, by means of jumpers it is possible setting predefined curves for Open Lead Acid, Sealed Lead Acid, Gel, Ni-Cd and. A rugged casing with bracket for DIN rail mounting provide IP20 protection degree.

### General Data

Insulation voltage (In /Out)	3000 Vac
Insulation voltage (In / PE)	1605 Vac
Insulation voltage (Out / PE)	500 Vac
Protection Class (EN/IEC 60529)	IP20
Protection class	I, with PE connected
Reliability: MTBF IEC 61709	> 300.000 h
Pollution Degree Environment	2
Connection Terminal Blocks screw Type	2,5mm(24-14AWG)
Dimensions (w-h-d)	45x105x100 mm
Weight	0.30 Kg approx

### Climatic Data

Ambient temperature (operation)	-25 ÷ +70°C
De Rating T <sup>a</sup> > 50°C	- 2.5%(In) / °C
Ambient temperature Storage	-40 ÷ +85°C
Humidity at 25 °C no condensation	95% to 25°C
Cooling	Auto Convention

### Norms and Certifications

Conforming to: IEC/EN 60335-2-29, EN60950/UL1236, Electrical safety, 89/336/EEC, EMC Directive, 2006/95/EC (Low Voltage), DIN41773 (Charging cycle), Emission: IEC 61000-6-4, Immunity: IEC 61000-6-2, CE

### Signal Output (free switch contact)

Main or Backup Input Power	Yes
Low Battery	Yes
Fault Battery	Yes

### Type of Signal Output Contact (free switch contact)

Max. current can be switched (EN60947.4.1):	Resistive load
Max. DC1: 30 Vdc 1 A; AC1: 60 Vac 1A	Min. load
Min. 1mA at 5 Vdc	

### Input Data

Nominal Input Voltage (2 x Vac)	115 – 230 – 277
Input Voltage range (Vac)	90 – 305
Inrush Current (Vn and In Load) I <sup>2</sup> t	≤ 16 A ≤ 5 msec.
Frequency	47 – 63 Hz ±6%
Input Current (115 – 270 Vac)	2.4 – 1.2 A

Internal Fuse	4 A
External Fuse (recommended)	10 A (MCB curve B)

### Battery Output 24 Vdc (depend on jumper selection)

Boost charge (Typ. at In)	28.8 Vdc
Recovery Charge	2 – 16 Vdc
Charging. Max I <sub>batt</sub> < 40°C (In)	5 A ± 5%
Charging. Max I <sub>batt</sub> > 40°C (In)	3.5 A ± 5%

### Battery Output 12 Vdc (depend on jumper selection)

Boost charge (Typ. at In)	14.4 Vdc
Recovery Charge	2 – 7 Vdc
Charging. Max I <sub>batt</sub> < 40°C (In)	6 A ± 5%
Charging. Max I <sub>batt</sub> > 40°C (In)	6 A ± 5%

### Generic Output Data

Max. time Bust Charge (typ. At In)	15 h
Min. time Bust Charge (typ. At In)	4 min.
Jumper Configuration battery type (V cell) Ni-Cd (optional); when in Trickle Charging mode	2,23;2,25;2,27;2,3; 1,41-1,5 (20 cell.)
Power Supply function	By Jumper Enabling
Select Output Voltage 12 or 24 Vdc	By Jumper Enabling
Select Boost or trickle charge	By Jumper Enabling
Efficiency (50% of In)	90%
Charging current limiting I <sub>adj</sub>	20 ÷ 100 % / I <sub>n</sub>
Quiescent Current	≤ 5 mA
Charging Curve automatic: IUoUo	4 stage
Detection of element in short circuit	Yes
Short-circuit protection)	Yes
Over Load protection	Yes
Over Voltage Output protection	Yes

### Charging

Type of charging it is Voltages and current stabilized IUoUo. The state of charging battery and Auto-diagnosis of the systems are identified by a blinking code on a Diagnosis LED and Battery Fault LED:

	State	Diagnosis LED	Battery Fault LED
Charging Type	Trickle - Float	1 Blink/sec	OFF
	Absorption	1 Blink/sec	OFF
	Boost – Bulk	3 Blink/sec	OFF
	Recovery	5 Blink/sec	OFF
Auto diagnosis	Reverse polarity	1Blink	ON
	Battery No connect	2Blink	ON
	Element in Short C.	3Blink	ON
	Replace Battery	5Blink	ON

